


# HOISTS & PATIENT HANDLING EQUIPMENT

## PROMED SLINGS

Model No.	Promed General Purpose Slings with Head Support (PGPS)	Size*
<b>HPGP17P</b>	(PGPS), polyester.	XS, S, M, L
<b>HPGP17PH</b>	(PGPS), w/head support, polyester.	XS, S, M, L
<b>HPGP17M</b>	(PGPS), mesh.	XS, S, M, L
<b>HPGP17MH</b>	(PGPS), with head support, mesh.	XS, S, M, L
<b>HPGP17G</b>	(PGPS), hygiene.	S, M, L
<b>HPGP17GH</b>	(PGPS), with head support, hygiene.	XS, S, M, L

*\*Small and Large size of sling may be more expensive, please check our price.*

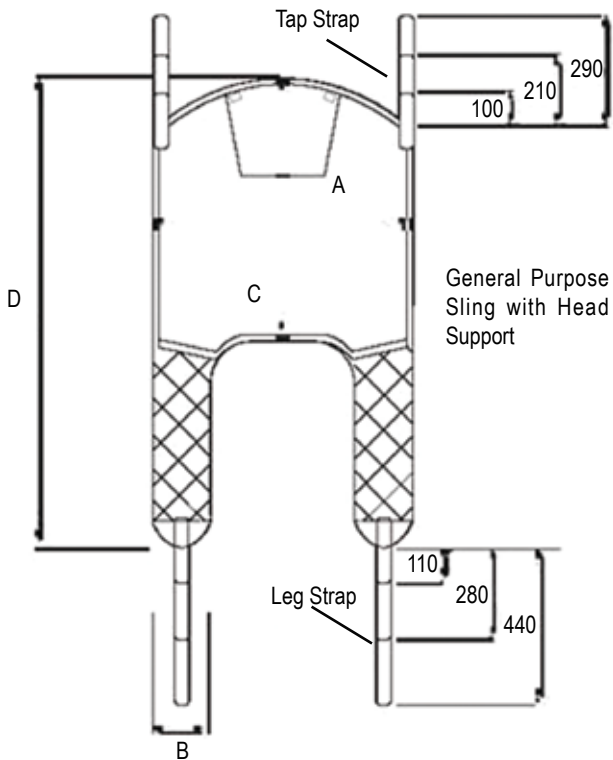

Size	XS	S	M	L
Dimensions for PGPS with Head Support, cm				
A	82	83	97	114
B	19	23	23	25
C	76	79	92	99
D	129	133	145	168

**Capacity of Slings**  
**Small** 20 - 50 kg  
**Medium** 50 - 100 kg  
**Large** 100 - 175 kg

## OXFORD SLINGS

Style	Model No.	Size
Access padded -polyester	<b>H1601</b>	S
	<b>H1603</b>	M
	<b>H1606</b>	L
Quickfit, Padded	<b>H1009P</b>	S
	<b>H1012P</b>	M
	<b>H1015P</b>	L
Quickfit deluxe padded -polyester	<b>H1050P</b>	S
	<b>H1053P</b>	M
	<b>H1056P</b>	L
Quickfit deluxe padded with head support -polyester	<b>H1060P</b>	S
	<b>H1063P</b>	M
	<b>H1066P</b>	L

## OXFORD DIPPER POOL HOIST

The Dipper is for use at swimming pools, therapy pools and quayside locations with a specification that is highly functional and easy to use. It's design ensures full integration with the pool or quayside environment. Hydraulic operation reduces maintenance. The Dipper is made with stainless steel and coated mild steel.

The market leading Dipper is a proven, reliable and safe method of gaining access to the water and has a weight capacity of 140 kg. The Dipper hoist can be used with either a spreader bar and many different sling arrangements or may be used with the RANGER transporter chair.




Dipper with spreader bar and sling.




Dipper with Ranger Transporter.




Dipper with Ranger Transporter Seat.



Socket A, cement in



Socket B, decking



Socket C, above ground

	Model No
Dipper & Ranger Transporter	<b>HOP10013</b>
Dipper w/spreader bar	<b>HOP10014</b>
Socket, Cement in (A)	<b>HOP1000A</b>
Socket, Decking floor (B)	<b>HOP1000B</b>
Socket, above ground (C)	<b>HOP1000C</b>
Weight Capacity, kg	140
Boom length, cm	150
Max. Height, cm, A, B/C	211/226
Min. Height, cm, A, B/C	142/157
Base of seat above fl, A, B/C	89/104
Base of seat below fl, A, B/C	91/76